

Problem Sheet: Introductory Concepts Communication Systems

Professor A. Manikas
Chair of Communications and Array Processing
Department of Electrical & Electronic Engineering
Imperial College London

v.11

1. Sketch and mathematically represent the pdfs of the following signals:

(a) $4 \text{ rep}_{3T} \left\{ \Lambda \left(\frac{t}{T} \right) \right\} - 1$ (10%)

(b) $\text{rep}_{2T} \left\{ 2 \text{rect} \left(\frac{t}{T} \right) + 4 \Lambda \left(\frac{2t}{T} \right) \right\}$ (10%)

(c) $\text{rep}_{2T} \left\{ 5 \text{rect} \left(\frac{t}{T} \right) - \text{rect} \left(\frac{t-T}{T} \right) \right\}$ (10%)

(d) $\text{rep}_{6T} \left\{ 4 \text{rect} \left(\frac{t}{5T} \right) - \text{rect} \left(\frac{t-3T}{T} \right) \right\}$ (5%)

(e) $\frac{N+1}{N} \text{rep}_{NT} \left\{ \Lambda \left(\frac{t}{T} \right) \right\} - \frac{1}{N}$ with $N \in \mathbb{Z}^+ > 2$ (15%)

(f) $3 \text{rep}_2 \left\{ \Lambda(t) \right\} - 2$ (5%)

2. Evaluate:

(a) $-\infty \int^{\infty} (t^4 - 3t + 1) \cdot \delta(t - 2) \cdot dt$ (10%)

(b) $-\infty \int^{\infty} \left\{ \cos(4\pi t) * \delta\left(t + \frac{1}{4}\right) \right\} \cdot \delta\left(t - \frac{1}{8}\right) \cdot dt$ (10%)

(c) $\int_{-\infty}^{\infty} (t^3 - 3t^2 - 11) \cdot \delta(t - 1) \cdot dt$ (5%)

(d) $\int_{-\infty}^{\infty} \left\{ \sin(4\pi t) * \delta\left(t + \frac{1}{4}\right) \right\} \cdot \delta\left(t - \frac{1}{4}\right) \cdot dt$ (5%)

(e) $\int_{-\infty}^{\infty} (t^3 - 2t^2 + 1) \cdot \delta(t - 2) \cdot dt$ (5%)


(f) $\int_{-\infty}^{\infty} \left\{ \cos(2\pi t) * \delta\left(t - \frac{1}{4}\right) \right\} \cdot \delta\left(t - \frac{1}{12}\right) \cdot dt$ (5%)

(g) $h(3)$ where $h(t) = (t \cdot \text{rect} \left\{ \frac{t}{8} \right\}) * \delta(t + 3)$ (5%)

(h) $h(3)$ where $h(t) = (t \cdot \text{rect} \left\{ \frac{t}{8T} \right\}) * \delta(t - 2)$ (10%)

(i) $h(3.5)$ where $h(t) = (t \cdot \text{rect} \left\{ \frac{t}{8T} \right\}) * \delta(t - 3)$ (10%)

3. The waveform below shows the autocorrelation function $R_{bb}(\tau)$ of what is called in communications a pseudo-random (PN) signal $b(t)$.

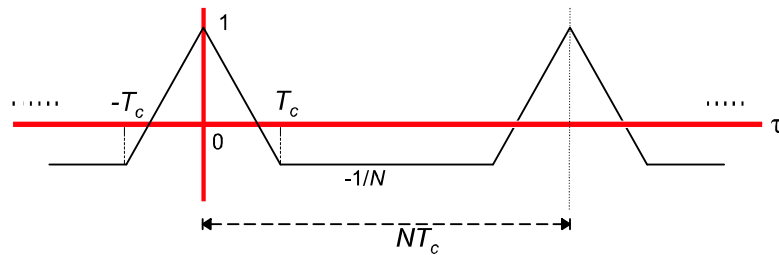


- (a) Write a mathematical expression, using Woodward's notation, to describe the above autocorrelation function. (15%)
- (b) Find the power spectral density $\text{PSD}_b(f)$ of $b(t)$. (20%)
4. At the input of a filter there is white Gaussian noise of power spectral density $\text{PSD}_{n_i}(f) = \frac{3}{2}10^{-6}$. If the transfer function of the filter is

$$H(f) = \Lambda \left\{ \frac{f}{10^6} \right\} \exp(-j\phi(f))$$

calculate the power of the signal at the output of the filter. (10%)

5. For the following differential circuit find:

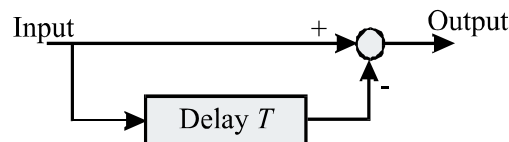

- (a) the impulse response and (5%)
- (b) frequency response (5%)
6. Consider the filter with impulse response

$$h(t) = \text{sinc}^2 \{10^6(t - 3)\}$$

and assume that the input signal $n_i(t)$ is white Gaussian noise with double-sided power spectral density $\text{PSD}_{n_i}(f) = 1.5 \times 10^{-6}$ W/Hz.

For the signal $n(t)$ at the output of the filter

- (a) find and plot its power spectral density $\text{PSD}_n(f)$; (10%)
- (b) calculate its power P_n (5%)
7. Consider a bandpass filter with impulse response

$$h(t) = 8 \times 10^3 \text{sinc} \{4 \times 10^3 t\} \cdot \cos(2\pi 10^4 t)$$

and assume that at the input of this filter there is white Gaussian noise $n_i(t)$ of power spectral density $\text{PSD}_{n_i}(f) = 10^{-6}$.

For the signal $n(t)$ at the output of the filter

- (a) find and plot its power spectral density $\text{PSD}_n(f)$; (10%)
- (b) calculate its power P_n (5%)

END